



Compressed Air Blow Guns

**Safety
Controlled-Flow**

**OSHA
Compliant**

Lever Operated Handy-Air® Blow Gun	Button Operated Handy-Air® Blow Gun	Nickel Plated Handy-Air® Blow Gun
		
Cat. No.	Cat. No.	Cat. No.
Pressed – Safety Tip	BG2L-30STP	BG2-30STP
Threaded – Safety Tip	BG2L-30STT	BG2-30STT
Pressed – Standard Tip	BG2L-30P	BG2-30P
Threaded – Standard Tip	BG2L-30T	BG2-30T

Inlet Pressure: 150 PSIG maximum

Temperature: +32° to +180° F

Flow Safety Tip: 19.8CFM@100 PSIG

Flow Standard Tip: 9.3 CFM@100 PSIG

Body: Die cast Zinc:

Seal: Buna-N:

Inlet: 1/4" FPT

Safety Tip - Standard Tip – Handy-Air® models are available with either the standard or ST safety tip, each of which may be ordered pressed or threaded to the gun. The pressed tip is not removable and resists tampering. The threaded tip has a 1/8" NPT male thread. The ST safety tip provides a conical shield of air which encircles blown chips or particles directing them away from the operator.

Non-Regulated Blow Guns

Standard model blow guns are available for those installations not requiring reduced pressure. These two die cast models are not OSHA compliant.


Cat. No. BG2 (Button Operated)

Cat. No. BG2L (Lever Operated)

**Safety
Controlled- Flow**

**OSHA
Compliant**

1/4" FPT Inlet

Pistol Grip Blow Gun

Cat. No.
Pressed Safety Tip
Threaded Safety Tip

Inlet Pressure: 150 PSIG maximum

Temperature: +32° to +120° F






Flow: 19.8CFM@100 PSIG

Body: Nylon 6

Seal: Buna-N

Features

- OSHA Compliant
- Pistol grip design is more comfortable to operate
- Trigger/Valve design allows for variable output
- Safety tip standard
- Trigger serves as a convenient hanging hook
- Color, safety yellow

Blowgun Accessories		
Item	Cat. No.	Description
12" Extension	EX12	
		<ul style="list-style-type: none"> • Permanent extension. • Employs same tip as gun. • Dynamic and static pressures same as gun installed on.
10" Extension	EX10DH	
		<ul style="list-style-type: none"> • Removable extension, push on, twist off. • Durable tubing with female tapered fitting. • Fits snugly on standard or safety tip.
Rubber Tip	EX2RT	 <ul style="list-style-type: none"> • Protects delicate parts from damage • Blowguns with rubber tip will not comply with OSHA requirements. • Installs on all threaded blowguns with 1/8" NPT
Standard Safety Tip	EX2	 <ul style="list-style-type: none"> • High flow safety nozzle for general dusting and chip removal • Installs on all threaded blowguns with 1/8" NPT
Safety Air Screen Tip	EX2ST	 <ul style="list-style-type: none"> • Air screen nozzle reduces chip fly back • Installs on all threaded blowguns with 1/8" NPT

Compressed Air Blow Gun Kits




BG-KIT-F1 – The versatile Foster blow gun kit BG-KIT-F1 contains three of the most popular nozzles for industrial and automotive uses as well as a 1/4" standard plug for easy air hose connection. This kit includes a high quality, lever-operated heavy duty blow gun featuring a patented quick disconnect coupler which allows users to switch nozzles quickly and easily. Also included are a high flow safety nozzle, six inch extension safety nozzle, rubber tip nozzle and needle tip nozzle and quick connector plug for connecting blow gun to shop air supply. The kit comes ready for hanging display in a clear clamshell package.



BG-KIT-F2 – The Foster BG-KIT-F2 contains five of the most popular nozzles for industrial and automotive uses. This kit includes a high quality, lever-operated heavy-duty blow gun featuring a patented quick disconnect coupler which allows users to switch nozzles quickly and easily. This multi-use kit also contains a high flow safety nozzle, six inch extension safety nozzle, rubber tip nozzle, needle tip nozzle, and air-screen safety nozzle. For handy storage, a clear vinyl compartmented snap pouch is included.

Pistol Type Pneumatic Grease Gun [GG01]

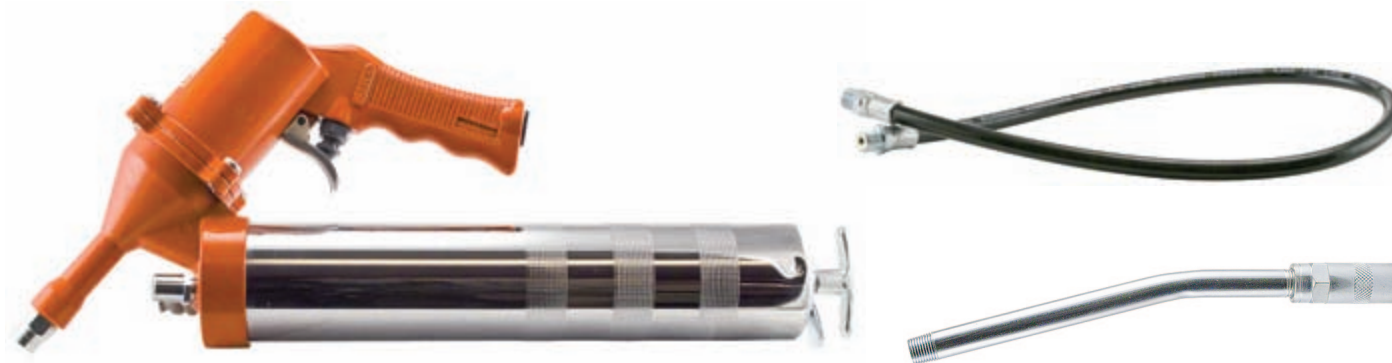

GG01 - Pistol-Type Pneumatic Grease Gun with 24" extension is ideal for many greasing applications, and features a trigger-release design for ease of reach for recessed fittings.

- Compact trigger-release design for easy access into recessed and hard-to-reach fittings
- Three way loading for versatility:
 - Standard 14-oz cartridge (not included)
 - Load with a pressure filter
 - Bulk load
- 24 inch flexible hose for extended working reach
- 1/4 inch NPT thread air inlet
- Inlet air pressure of 35 to 150 psi
- Rugged baked enamel and chrome finishes
- Comfortable hand grip and balanced design eliminate operator fatigue
- The light weight angled design allows easy operation in cramped or hard-to-reach spaces
- Air vent valve allows trapped air in the tube to escape after filling