

Suprene®

Thermoplastic Rubber Tubing




Celebrating
55
Years
of Service
1954-2009

ESOP Employee Owned
for Your Benefit

**NEWAGE
INDUSTRIES**

Fluid Transfer Specialists®

TPR Tubing

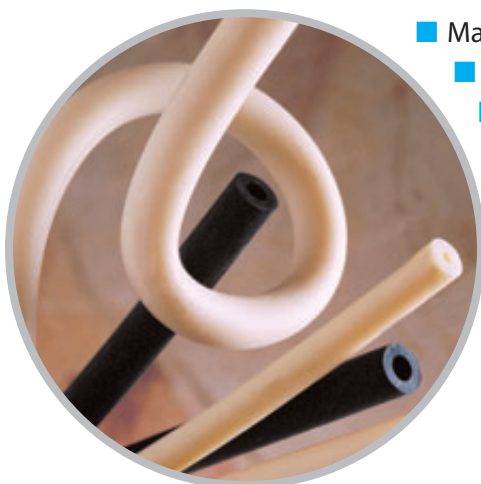

- Made of first-quality, polypropylene-based, thermoplastic rubber (TPR)
- Outstanding compression characteristics and toughness for peristaltic pump uses
- Available in both FDA and industrial grades
- Natural 80A material is listed by the National Sanitation Foundation (NSF-51)* for food equipment materials
- Material meets UL94 HB burn rating



Notes

SUPRENE offers excellent flex fatigue resistance and good tear resistance, making it an ideal choice for peristaltic pump applications. The FDA material is suitable for a variety of clean uses and is autoclavable to ensure cleanliness.

Black industrial SUPRENE offers good resistance to U.V., ozone, chemicals, and other fluids. It will also handle applications where oil may splash onto the tubing and is well suited for outdoor use.

*Other durometers with an NSF listing are available as a custom item — call for details.

Physical Properties**

	Natural FDA 64A	Natural FDA 80A	Black Ind. 64A
Hardness, Shore A @ 77°F, ±5	64	80	64
Tensile Strength @ 77°F, psi	950	1600	1000
Elongation at Break, %	400	450	400
Tear Strength @ 73°F, pli	140	194	140
Compression Set % @ 73°F after 168 hrs.	22	29	22
212°F after 168 hrs.	34	41	34
Brittle Temperature, °F	<-76	<-76	<-76
Minimum Recommended Operating Temp., °F	-60	-60	-60
Maximum Recommended Operating Temp., °F	275	275	275

**Values listed are typical for the material used in manufacture, except where noted, and are meant only as a guide to aid in design. Field testing should be performed to find the actual values for your application.

Recommended Fittings & Clamps

- Thermobarb® barbed fittings
- Oetiker® ear type clamps
- Kwik Clamp™ nylon double bond hose clamps
- Worm gear clamps

SUPRENE — Natural FDA 64A Durometer

PART NO.	ID (IN.)	OD (IN.)	WALL (IN.)	STANDARD LENGTH (FT.)	LBS. PER 100 FT.
460 0246	1/8	1/4	1/16	50	1.55
460 0414	3/16	5/16	1/16	50	2.06
460 0582	1/4	3/8	1/16	50	1.15
460 0638	1/4	1/2	1/8	50	6.19
460 0694	5/16	7/16	1/16	50	3.09
460 0862	3/8	1/2	1/16	50	3.61
460 0974	3/8	5/8	1/8	50	8.26
460 1198	1/2	5/8	1/16	50	4.65
460 1310	1/2	3/4	1/8	50	10.32
460 1646	5/8	7/8	1/8	50	12.39
460 1926	3/4	1	1/8	50	14.45

SUPRENE — Natural FDA 80A Durometer

PART NO.	ID (IN.)	OD (IN.)	WALL (IN.)	STANDARD LENGTH (FT.)	LBS. PER 100 FT.
460 6014	1/8	1/4	1/16	50	1.55
460 6350	1/4	3/8	1/16	50	1.15
460 6406	1/4	1/2	1/8	50	6.19
460 6462	5/16	7/16	1/16	50	3.09
460 6630	3/8	1/2	1/16	50	3.61
460 6742	3/8	5/8	1/8	50	8.26
460 7078	1/2	3/4	1/8	50	10.32
460 7638	3/4	1	1/8	50	14.45

SUPRENE — Black Industrial 64A Durometer

PART NO.	ID (IN.)	OD (IN.)	WALL (IN.)	STANDARD LENGTH (FT.)	LBS. PER 100 FT.
461 0228	1/8	1/4	1/16	50	1.55
461 0396	3/16	5/16	1/16	50	2.06
461 0564	1/4	3/8	1/16	50	1.15
461 0620	1/4	1/2	1/8	50	6.19
461 0676	5/16	7/16	1/16	50	3.09
461 0844	3/8	1/2	1/16	50	3.61
461 0956	3/8	5/8	1/8	50	8.26
461 1180	1/2	5/8	1/16	50	4.65
461 1292	1/2	3/4	1/8	50	10.32
461 1628	5/8	7/8	1/8	50	12.39

Add length suffix to part number when ordering. Example: 50 ft. of 1/8" I.D. x 1/4" O.D. tubing is part number 461 0228-50. **BOLD** indicates the critical dimension for fittings application.

Custom Services

- **Cut** ■ **Color**
- **Size** ■ **Hardness** ■ **Overbraid** ■ **And More**

Call for more information: **800-506-3924 or 215-526-2300**

Suprene, Kwik Clamp, Thermobarb, NewAge, "Fluid Transfer Specialists," and The "N" Logo are trademarks of NewAge® Industries, Inc. • Oetiker reg. TM Oetiker, Inc.

WARRANTY: NewAge Industries' products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries' products, item for item, which after examination by NewAge Industries are deemed defective. NewAge Industries specifically disclaims any other liability. The data supplied is provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarantee, recommendation, or warranty for any application.

NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term NewAge.

© NewAge Industries, Inc. 2009 Specifications are subject to change without notice.

6/24/09

DISTRIBUTOR PARTNER



145 James Way
Southampton, PA 18966
www.newageindustries.com

800-50-NEWAGE
(800-506-3924)
215-526-2300

Fax: 800-837-1856
215-526-2190

info@newageindustries.com