



# SRC SERIES

## The new SRC connector

is a small bore connector that eliminates the potential for misconnections with luer fittings. The intuitive design is simple for end users to operate and provides an audible "click" for added assurance and a secure, leak-free connection. This new connector features a unique elastomeric seal with a smooth, gap-free flow path that provides better flow characteristics and eliminates stagnant flow areas.

### Features

- Prevents misconnections
- Reliable elastomeric seals
- Audible "click" and positive feel
- Allows tubing rotation

### Benefits

- Won't connect to IV lines and other non-compatible applications
- Leak-free connections
- Operators know when a secure, reliable connection is made
- Prevents accidental disconnect or kinked tubing

## Specifications

**Pressure:** Vacuum to 25 psi, 1.7 bar

**Temperature:** 32° to 110° F (0° to 43° C)  
(rated for shipment uncoupled up to 160° F)

### Materials:

**Main components:** Polypropylene with overmolded TPE\* pads, USP Class VI, ADCF

**Integral seals:** Overmolded TPE\*, USP Class VI, ADCF

**Color:** White with blue pads


**Sterilization:** EtO, e-beam or gamma

### Tubing Sizes:

1/8" to 3/16" ID, 3.2mm to 4.8mm ID

Add "CL" to the end of the plastic SRC part numbers below for cleanroom manufactured versions.


SRC Water Flow

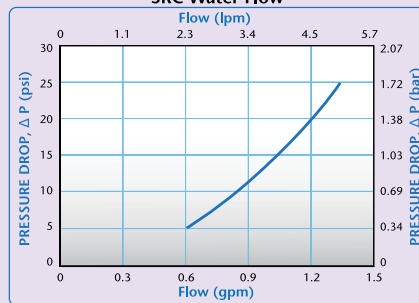

This graph is intended to give you a general idea of the performance capabilities of the product.

## Product Dimensions

- A = Height/Diameter
- B = Total Length

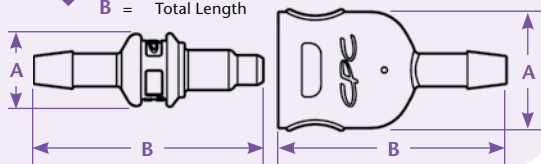

	PANEL OPENING	MAX. PANEL THICKNESS	MIN. PANEL THICKNESS
<b>COUPLING BODIES AND INSERTS</b>	7/16	.21	.03
	PANEL NUT HEX	PANEL NUT THREAD	
	1/2	7/16-24UNS	

## Coupling Bodies POLYPROPYLENE

TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	A	B
IN-LINE	1/8" ID	3.2mm ID	SRC1702	.62	1.18
HOSE BARB	3/16" ID	4.8mm ID	SRC1703	.62	1.18

## Coupling Inserts POLYPROPYLENE

TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	A	B
IN-LINE	1/8" ID	3.2mm ID	SRC2202	.38	1.19
HOSE BARB	3/16" ID	4.8mm ID	SRC2203	.38	1.19

## CHROME-PLATED BRASS

TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	A	B
PANEL MOUNT	1/8" ID	3.2mm ID	SRC4202CB	.57	1.66
HOSE BARB	3/16" ID	4.8mm ID	SRC4203CB	.57	1.66

## Accessories



PART NO.	DESCRIPTION	MATERIALS
SRC3L	Tethered cap and plug for SRC body and insert	White medical-grade TPE



Call toll free 1-800-444-2474 or visit us at [www.colder.com](http://www.colder.com)

Copyright © 2011 by Colder Products Company. All rights reserved. Colder Products Company, Colder Products and CPC are registered trademarks with the US Patent & Trademark Office.